

# Technical data sheet

## Service pole, type ISS70110

Item number: 6288943



ISS aluminium service pole with a 76.5 mm system opening.

Set consists of:

1 single-compartment pole with clamping fastening

Total length 3,315–3,480 mm

1 ceiling fastening with clamping device

1 aluminium cover

Length: 3,000 mm

The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD... The installation of a partition of type GA-TW70 (6279711) and the installation of the cover clip, type KL80A (6288640), are possible as an option.

The following accessories can be used, depending on the mounting situation.



**Alu** Aluminium

**EL** Anodised

### Master data

Item number	6288943
Type	ISS70110EL
Description 1	Service pole
Description 2	floor/ceiling
Manufacturer	OBO
Dimension	3000x110x70
Colour	aluminium
Material	Aluminium
Surface	Anodised
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	750 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	98,2663 kg CO2e / 1 Piece


# Technical data sheet

Service pole, type ISS70110

Item number: 6288943



## Dimensions

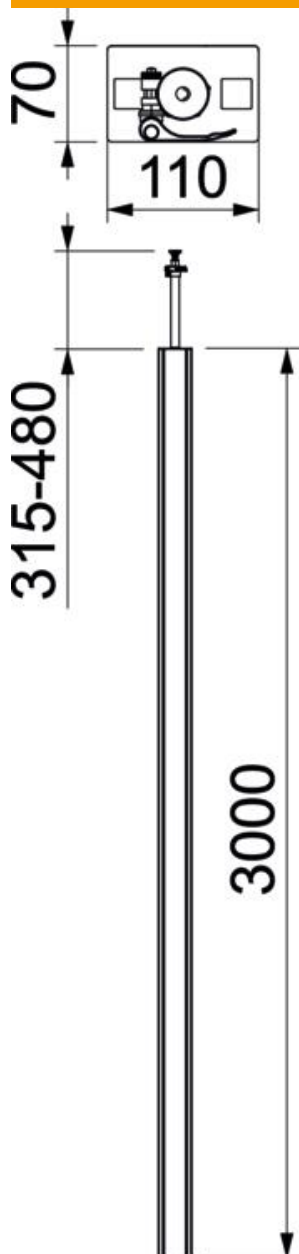

Length	3,000 mm
Width	110 mm
Height	70 mm

# Technical data sheet

Service pole, type ISS70110

Item number: 6288943



## Technical data

Number of usable covers	1
Number of compartments	1 St.
Version for	Single-sided
Fastening type	Tension
Floor mounting	yes
Ceiling mounting	yes
Continuous profile	yes
Halogen-free	yes
Height compensation, max.	480 mm
Height compensation, min.	315 mm
Cable entry	Top/bottom
Cover width	76.5 mm
Changes according to location	no
Pole shape	Rectangular
Pole height, max.	3480 mm
Pole height, min.	3315 mm
Adjustable	yes
Pre-wired	no